


LANGIR

COUPLERS


The user disassembles and assembles conveniently, safe, quickly. The cover and the base of the couplers used quick-lock system to twist mating tightly, the rear part use the thread to seal and lock the cable without using other insulating clamp to fix.

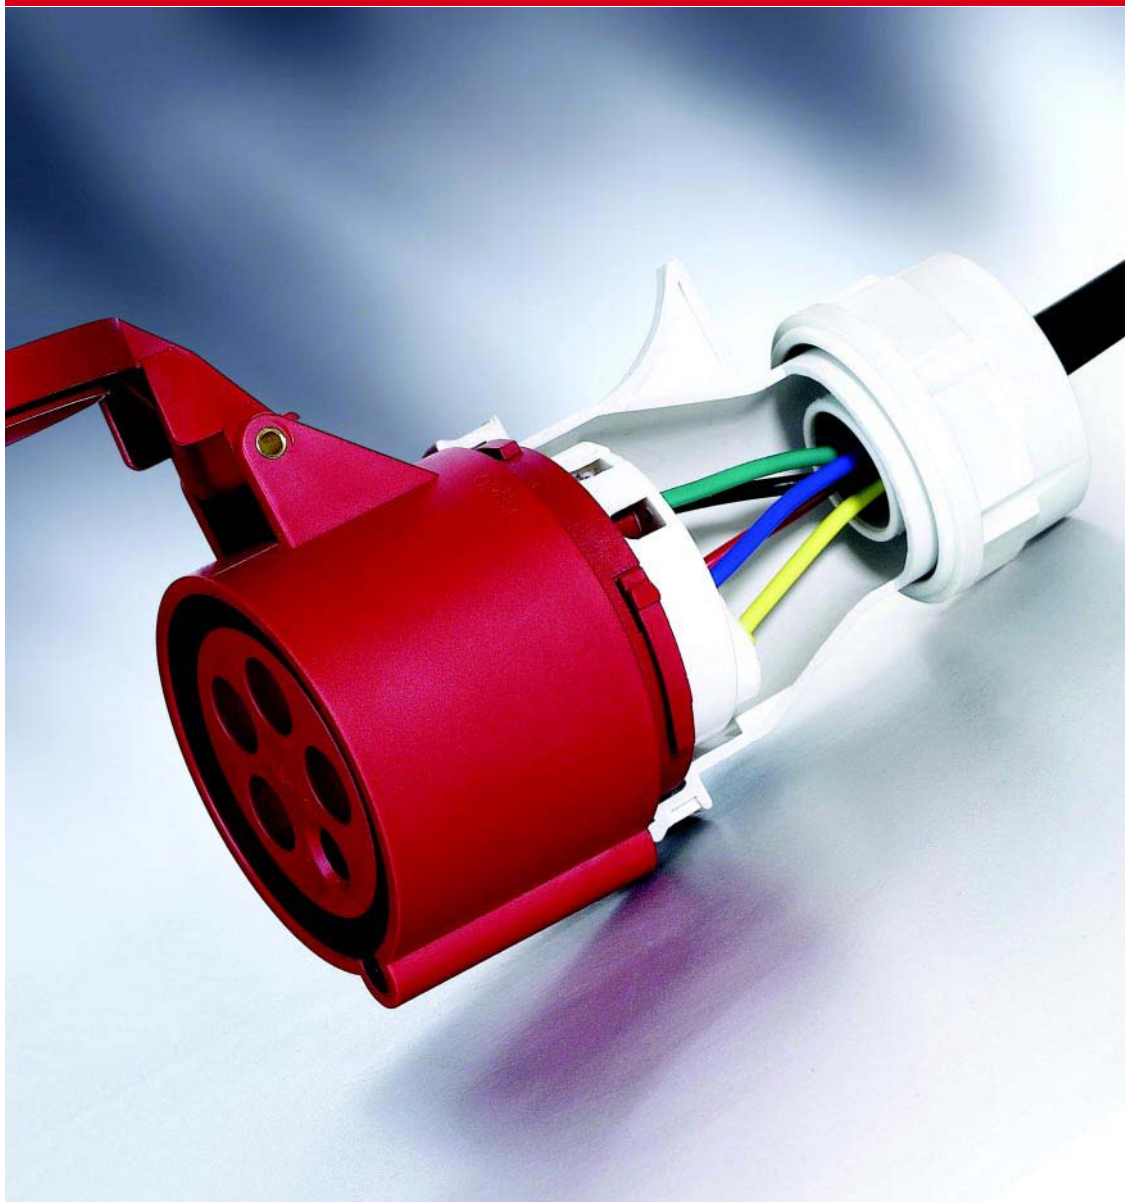

L213-3



- > current:16A
- > voltage:>50-250V=2P+E
- > IP44 splashproof

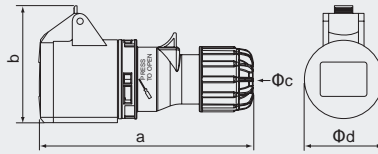


earth contact position		3h
	pole	3
dimension(mm)	a	130
	b	75.6
	c	12
	d	52
cable nominal cross-section area(mm ²)		1-2.5

L213-4



- > current:16A
- > voltage:110-130V~2P+E
- > IP44 splashproof

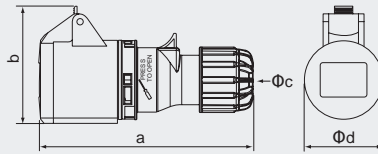


earth contact position		4h
	pole	3
dimension(mm)	a	130
	b	75.6
	c	12
	d	52
cable nominal cross-section area(mm ²)		1-2.5

L213



- > current:16A
- > voltage:220-250V~2P+E
- > IP44 splashproof

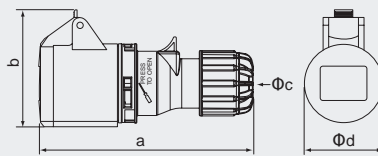


earth contact position		6h
	pole	3
dimension(mm)	a	130
	b	75.6
	c	12
	d	52
cable nominal cross-section area(mm ²)		1-2.5

L214



- > current:16A
- > voltage:380-415V~3P+E
- > IP44 splashproof

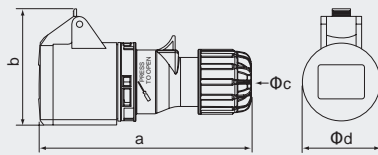


earth contact position		6h
	pole	4
dimension(mm)	a	135
	b	83
	c	12
	d	58
cable nominal cross-section area(mm ²)		1-2.5

L214-9



- > current:16A
- > voltage:220-250V~3P+E
- > IP44 splashproof

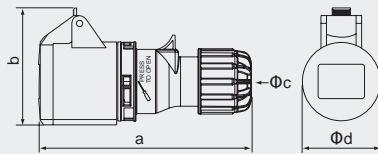


earth contact position		9h
	pole	4
dimension(mm)	a	135
	b	83
	c	12
	d	58
cable nominal cross-section area(mm ²)		1-2.5

L215



- > current: 16A
- > voltage: 220-380V~3P+N+E
240-415V~
- > IP44 splashproof

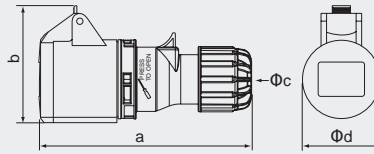


earth contact position		6h
	pole	5
dimension(mm)	a	142
	b	89.5
	c	12
	d	62.8
cable nominal cross-section area(mm ²)		1-2.5

L223-4



- > current: 32A
- > voltage: 110-130V~2P+E
- > IP44 splashproof

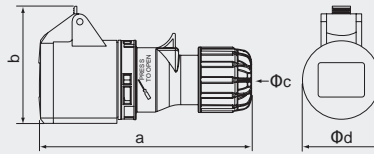


earth contact position		4h
	pole	3
dimension(mm)	a	162
	b	94
	c	17
	d	64.6
cable nominal cross-section area(mm ²)		2.5-6

L223



- > current: 32A
- > voltage: 220-250V~2P+E
- > IP44 splashproof

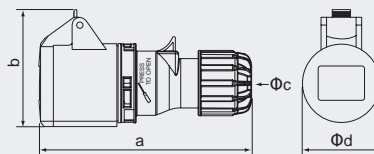


earth contact position		6h
	pole	3
dimension(mm)	a	162
	b	94
	c	17
	d	64.6
cable nominal cross-section area(mm ²)		2.5-6

L224



- > current: 32A
- > voltage: 380-415V~3P+E
- > IP44 splashproof

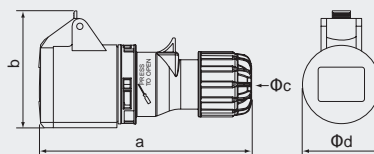


earth contact position		6h
	pole	4
dimension(mm)	a	162
	b	94
	c	17
	d	64.6
cable nominal cross-section area(mm ²)		2.5-6

L224-9



- > current: 32A
- > voltage: 220-250V~3P+E
- > IP44 splashproof

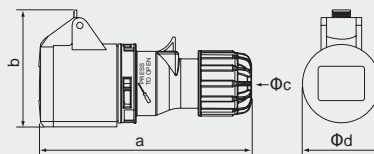


earth contact position		9h
	pole	4
dimension(mm)	a	162
	b	94
	c	17
	d	64.6
cable nominal cross-section area(mm ²)		2.5-6

L225



- > current:32A
- > voltage: 220-380V~ 240-415V~ 3P+N+E
- > IP44 splashproof

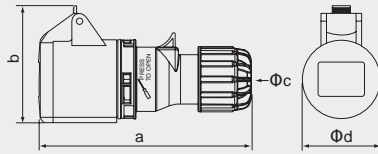


earth contact position		6h
	pole	5
dimension(mm)	a	163.5
	b	100
	c	17
	d	71
cable nominal cross-section area(mm ²)		2.5-6

L2131-4



- > current:16A
- > voltage:110-130V~2P+E
- > IP67 watertight

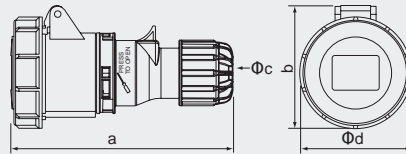


earth contact position		4h
	pole	3
dimension(mm)	a	134
	b	78.5
	c	12
	d	71
cable nominal cross-section area(mm ²)		1-2.5

L2131



- > current:16A
- > voltage:220-250V~2P+E
- > IP67 watertight

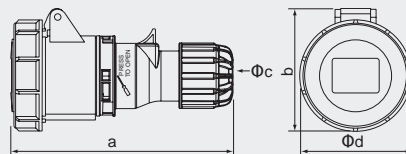


earth contact position		6h
	pole	3
dimension(mm)	a	134
	b	78.5
	c	12
	d	71
cable nominal cross-section area(mm ²)		1-2.5

L2141



- > current:16A
- > voltage:380-415V~3P+E
- > IP67 watertight

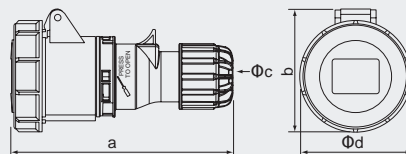


earth contact position		6h
	pole	4
dimension(mm)	a	138
	b	85
	c	12
	d	79
cable nominal cross-section area(mm ²)		1-2.5

L2151



- > current:16A
- > voltage: 220-380V~ 240-415V~ 3P+N+E
- > IP67 watertight

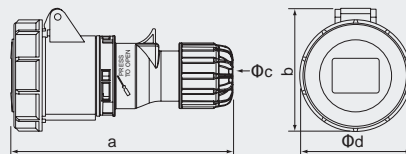


earth contact position		6h
	pole	5
dimension(mm)	a	146
	b	93
	c	12
	d	86.5
cable nominal cross-section area(mm ²)		1-2.5

Couplers

L2231-4



- > current:32A
- > voltage:110-130V~2P+E
- > IP67 watertight

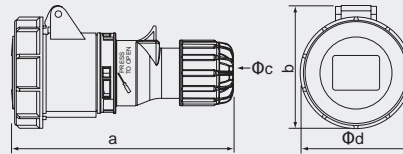


earth contact position	4h	
pole	3	
dimension(mm)	a	166
	b	98
	c	17
	d	93.5
cable nominal cross-section area(mm ²)	2.5-6	

L2231



- > current:32A
- > voltage:220-250V~2P+E
- > IP67 watertight

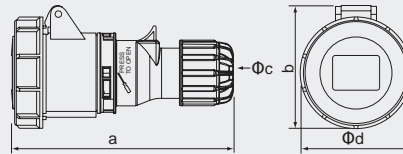


earth contact position	6h	
pole	3	
dimension(mm)	a	166
	b	98
	c	17
	d	93.5
cable nominal cross-section area(mm ²)	2.5-6	

L2241



- > current:32A
- > voltage:380-415V~3P+E
- > IP67 watertight

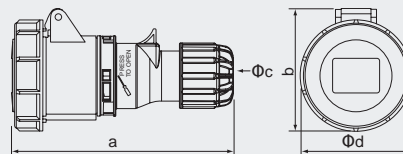


earth contact position	6h	
pole	4	
dimension(mm)	a	166
	b	98
	c	17
	d	93.5
cable nominal cross-section area(mm ²)	2.5-6	

L2241-3



- > current:32A
- > voltage:380-440V~3P+E
- > IP67 watertight
- > Only for refrigerated containers

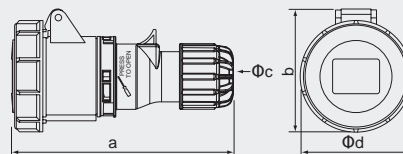


earth contact position	3h	
pole	4	
dimension(mm)	a	166
	b	98
	c	17
	d	93.5
cable nominal cross-section area(mm ²)	2.5-6	

L2251



- > current:32A
- > voltage:220-380V~3P+N+E
240-415V~3P+N+E
- > IP67 watertight

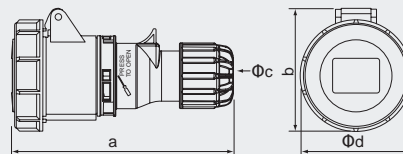

earth contact position	6h	
pole	5	
dimension(mm)	a	171
	b	104
	c	17
	d	99.5
cable nominal cross-section area(mm ²)	2.5-6	

Couplers


L2331
L2341
L2351



> current:63A

L2331	L2341	L2351
220-250V~	380-415V~	220-380V~ 240-415V~
2P+E	3P+E	3P+N+E

> IP67 watertight

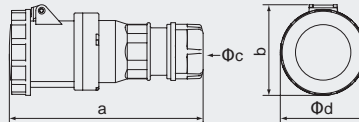

earth contact position	6h	
	pole	3/4/5
dimension(mm)	a	271
	b	115
	c	30
	d	109
cable nominal cross-section area(mm ²)	6-16	


L2431
L2441
L2451



> current:125A

L2431	L2441	L2451
220-250V~	380-415V~	220-380V~ 240-415V~
2P+E	3P+E	3P+N+E

> IP67 watertight



earth contact position	6h	
	pole	3/4/5
dimension(mm)	a	305
	b	115
	c	44.5
	d	130
cable nominal cross-section area(mm ²)	16-50	